

DuploMED® 80008



Diagnostic



Electrodes



Woundcare



Surgical



Ostomy



Consumer
Healthcare



Product construction

	Name	Color	Thickness (mm)
Liner	Single sided siliconized paper	white / light tan	approx. 0,08
Adhesive closed side	Acrylic	clear	approx. 0,09
Carrier	Ethylene methacrylate	hazy	
Total thickness			approx. 0,17

Main application fields

- Skin dressing
- Incise films

Product advantages / Features and Benefits

- The flexible film gives a high level of conformity for good adhesion to rough surfaces
- Pure acrylic adhesive provides excellent compatibility with a variety of surfaces
- Medical-grade adhesive has excellent adhesion to skin

Standard technical data

Peel strength *	on steel according to DIN EN 1939, edition 1996, at +23 °C ± 2°C	38	N/25 mm
Grammage *	internal test method	33	g/m ²
Liner Release *	internal test method	< 0,40	N/25mm

* Test results are statistically approved.

DuploMED® 80008

Biocompatibility and safety

Customers should perform their own assessment to ensure the final product is in compliance with all applicable Medical Device regulatory requirements. To support the assessment, and upon request, Lohmann can provide, where available, biocompatibility testing results (ISO10993) specific to either the product supplied by Lohmann or its' constituent components.

Application condition


Recommended application temperature	18 °C to 35 °C
Application guidelines	www.lohmann-tapes.com

Storage and shelf-life

Adhesive tapes should be stored at room temperature and normal humidity (50-70 %).
When properly stored the shelf-life of the product is at least 1 year after delivery.

Product presentation

Converted product	Rolls	Spools
Width [mm]	140 / 290	
Length [m]	970	
Max. log width:	60 inches	Other dimensions, die-cuts and sheets on request.

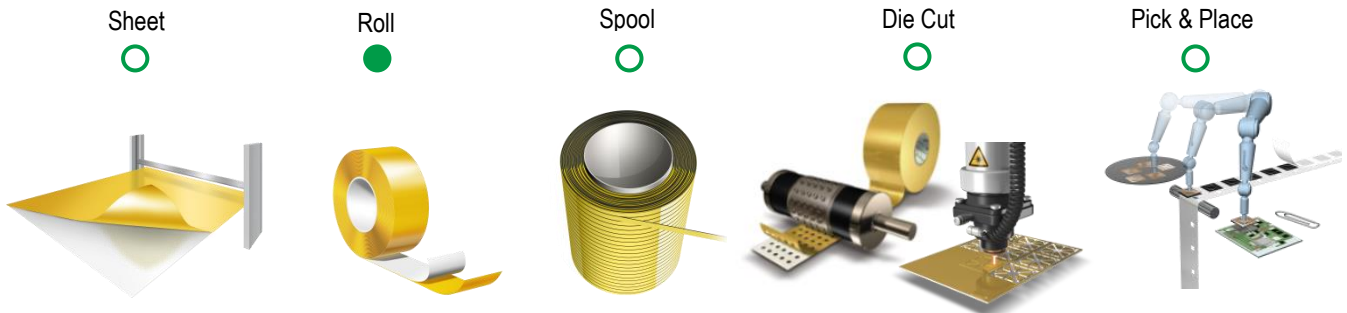

IMPORTANT NOTE

The physical characteristics contained in this data sheet represent typical or average values. All application related statements, information and recommendations herein are given to the best of our knowledge and practical experience. Many factors beyond our control and uniquely within buyer's knowledge and control can affect the use and performance of our tape in a particular application. EXCEPT AS EXPRESSIVELY AGREED IN WRITING WE DO NOT TAKE OVER ANY WARRANTY OR LIABILITY FOR THE SUITABILITY OR USABILITY OF OUR TAPES FOR CERTAIN PURPOSES AND APPLICATIONS RESULTING FROM BUYER'S SPECIAL USAGE OF THE TAPES. EXCEPT WHERE PROVIDED BY MANDATORY LEGAL PROVISIONS, WE WILL NOT BE LIABLE FOR ANY DIRECT OR INDIRECT MATERIAL OR IMMATERIAL LOSSES OR DAMAGES ARISING FROM THE USAGE OR APPLICATION OF OUR TAPES. Solely the buyer is responsible for determining the suitability of the specific tape for its use in connection with his method of application. Please consult our Technical Applications Department for specific advice.

Date of issue: March 2018