

Always the right choice as component in self-adhesive profile strips for new build and retro-fit applications.

### High initial tack and smooth in process


Powered by advanced polyester carrier technology for best performance and reliable process stability.

### Only 10 minutes to maximum performance

For saving time and enhancing efficiency with outstanding speed.

### Choice for less PCF

DuploCOLL 59153.4 uses eco-friendly solvent-free technology.

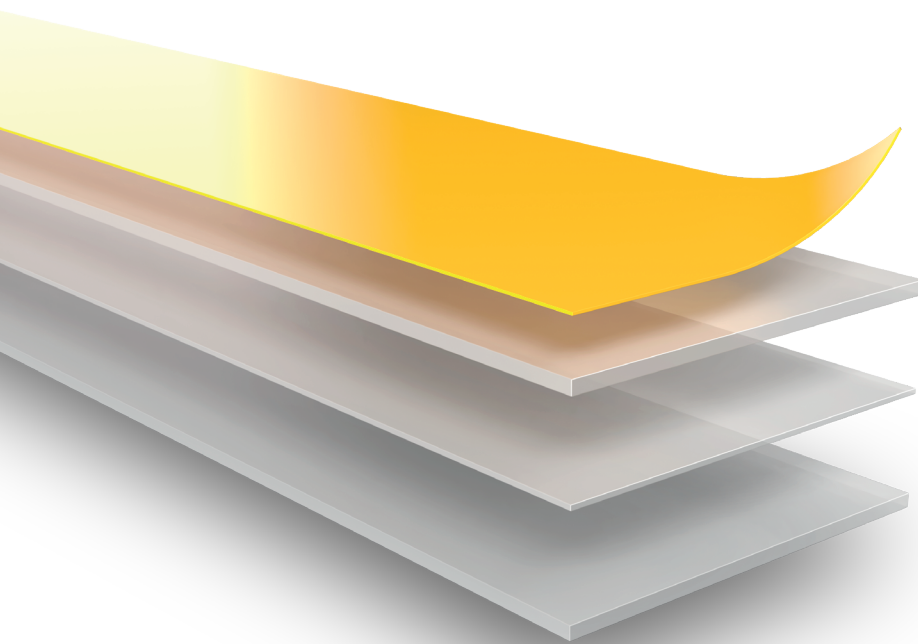

# DuploCOLL<sup>®</sup> 59153.4

## Adhesive Bonding Solution for Intumescence Door Strips