

DuploFLEX® 7 for Wide Web

Plate Mounting Tape in 0.55 mm Thickness

Efficiency


- Highest press speed due to fast foam compression capacity
- Highest print quality even at older presses as less sensitive to machine parameters and bouncing
- Shortest make ready down time due to bubble free mounting and superior resistance to edge lifting
- Fast and easy plate mounting and demounting due to PET reinforcement film on closed side
- Fail safe due to color coded products ensure immediate identification of the foam hardness
- Suitable for every kind of ink (UV-, solvent- and water-based)

Quality

- Excellent results for fine process work, brilliant halftones, perfect solids and clean fonts
- Available in various foam hardnesses according to your desired print image
- Minimized plate lifting and no uncontrolled dot gain as well as residue-free demounting
- Best in class plate mounting and demounting with engineered acrylic adhesives

Sustainability

- Reduced unsellable waste in make ready as less sensitive to machine parameters, press speed and bouncing
- More sellable printed material while the press is running and consuming energy
- Reduced waste stream due to prolonged plate life as the tape compensates for plate friction

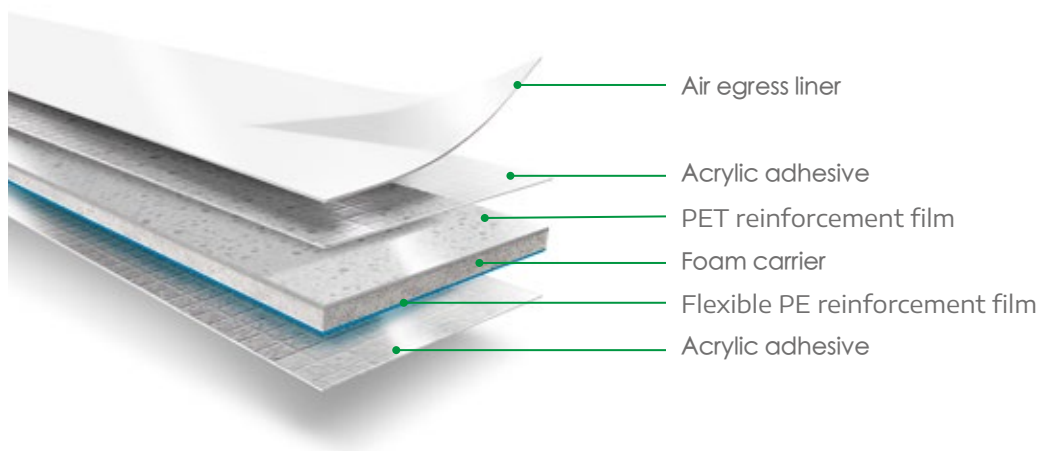

Desired Print image		Foam Hardness	Product
	Fine process work, highlights and very fine lines (minimized dot gain)	Soft	DuploFLEX 73131 DuploFLEX 71131
	Process work, brilliant half tones and fine lines	Medium-soft	DuploFLEX 73132 DuploFLEX 71132
	Halftones and lines, a combination of solids, line work and screen	Medium-hard	DuploFLEX 73133 DuploFLEX 71133
	Solids, lines, large fonts (dense ink coverage)	Hard	DuploFLEX 73134 DuploFLEX 71134

DuploFLEX® 7 for Narrow Web

Compressible Plate Mounting Tape in 0.38 mm Thickness

Efficiency


- Highest press speed due to fast foam compression capacity
- Highest print quality even at older presses as less sensitive to machine parameters and bouncing
- Shortest make ready down time due to bubble free mounting and superior resistance to edge lifting
- Fast and easy plate mounting and demounting due to PET reinforcement film on closed side
- Fail safe due to color coded products ensure immediate identification of the foam hardness
- Suitable for every kind of ink (UV-, solvent- and water-based)

Quality

- Excellent results for fine process work, brilliant halftones, perfect solids and clean fonts
- Available in various foam hardnesses according to your desired print image
- Minimized plate lifting and no uncontrolled dot gain as well as residue-free demounting
- Best in class plate mounting and demounting with engineered acrylic adhesives

Sustainability

- Reduced unsellable waste in make ready as less sensitive to machine parameters, press speed and bouncing
- More sellable printed material while the press is running and consuming energy
- Reduced waste stream due to prolonged plate life as the tape compensates for plate friction

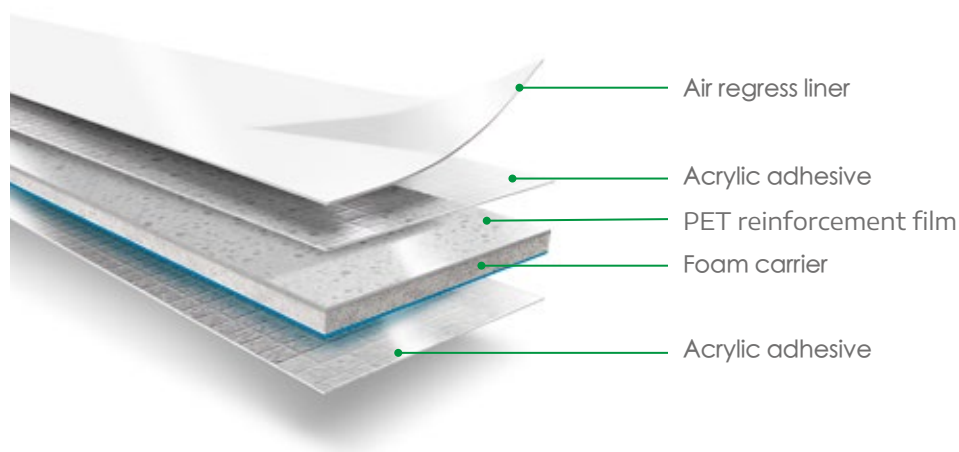

Desired Print image		Foam Hardness	Product
	Highlights, delicate process printing and very fine lines (minimized dot gain)	Medium soft	DuploFLEX 75022 DuploFLEX 75122
	Solids, lines and large fonts (dense ink coverage)	Hard	DuploFLEX 75024 DuploFLEX 75124